



Rec'd PCT/PTO 1 0 JUN 2005  
PCT/GB 2003 / 0 0 5 4 4 2



INVESTOR IN PEOPLE

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 20 JAN 2004

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 9 January 2004

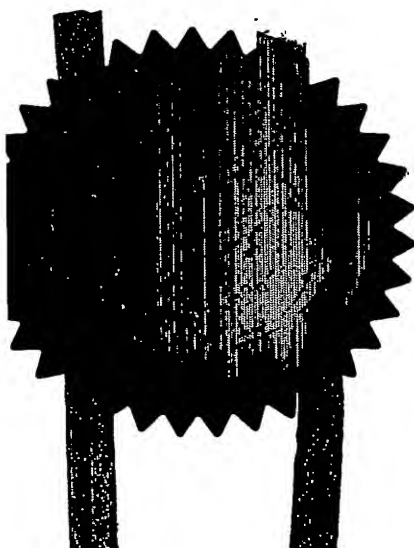

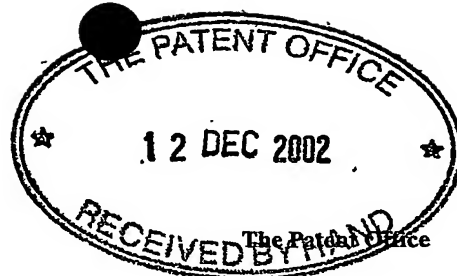

The Patent Office  
Cardiff Road  
Newport  
Gwent NP9 1RH

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference **GBP87054**

2. Patent application number  
(The Patent Office will fill in this part)

**0229079.9**

13DEC02 E770794-1 D03312  
P01/7700 0.00-0229079.9

3 Full name, address and postcode of the or of each applicant (underline all surnames)

University of Southampton,  
Highfield  
Southampton SO17 1BJ  
United Kingdom

Patents ADP number (if you know it)

**798470001**

If the applicant is a corporate body, give the country/state of its incorporation

England

4. Title of the invention **Electrochemical Cell For Use In Portable Electronic Devices**

5. Name of your agent (if you have one)  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Marks & Clerk  
57 - 60 Lincolns Inn fields  
London WC2A 3LS

Patents ADP number (if you know it)

**18001**

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application No  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

**Yes**

a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form	0
Description	18
Claim(s)	3
Abstract	1
Drawing(s)	7

*22*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature *Marks & Clark*

Date: 12 December 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

GB Patent Filings  
0207 400 3000

Electrochemical Cell For Use In Portable Electronic Devices

5 The present invention relates to a novel electrochemical cell, which may be a battery or a supercapacitor or both, for use in portable electronic devices, and specifically to such a cell having at least the positive electrode formed of a mesoporous material having a periodic arrangement of substantially uniformly sized pores of cross-section of the order of  $10^{-8}$  to  $10^{-9}$  m.

10 It should be noted that the term "battery" is used herein in its common meaning of a device that converts the chemical energy contained in its active components directly into electrical energy by means of a redox (oxidation-reduction) reaction. The basic unit of a battery is an electrochemical cell, which will comprise at least a positive electrode, a negative electrode and an electrolyte, the whole contained within a casing. Other components, such as separators, may be included, as is well known in the art. A  
15 battery may consist of one or more such cells.

Many portable electronic devices require power to be available as a steady flow at a relatively low level, interspersed with spikes or surges of much higher power drain. Most conventional batteries are unable to meet these requirements and so are frequently supplemented with a capacitor or supercapacitor, which stores power when it is not  
20 required by the device and releases it when required. Examples of devices having this type of power requirement include notebook computers, mobile telephones, PDAs (personal digital assistants – i.e. microcomputers) and the like. However, in such portable devices a high premium is put on portability, which is a function of both weight and size. Any additional equipment in the device inevitably adds to both of  
25 these, rendering the device less portable and so less desirable.

A consequent requirement of any electrochemical cell which is to function in such a portable device is that it should have both high power and high energy densities. In the past, it has only been possible to achieve one or the other of these at reasonable cost, and not both.

We have now discovered that the technology of mesoporous films, disclosed, for example, in EP 993 512 or US 6,203,925, may be applied to the production of one or both electrodes of an electrochemical cell, and that the resulting electrochemical cell, which may function as a battery, as a capacitor or as both, can be designed to have both  
5 high power density and high energy density.

Thus, the present invention provides an electrochemical cell for a portable electronic device, said cell having a positive electrode, a negative electrode and an electrolyte, characterised in that at least the positive electrode comprises a mesoporous structure having a periodic arrangement of substantially uniformly sized pores of cross-  
10 section of the order of  $10^{-8}$  to  $10^{-9}$  m.

The invention also provides a portable electronic device containing such an electrochemical cell.

The electrochemical cell of the present invention may be constructed to function as a battery, as a supercapacitor or as a combined battery/supercapacitor. For example,  
15 a supercapacitor having mesoporous positive and negative electrodes operates via the mechanism of proton shuttling between a mesoporous positive electrode, e.g. of  $\text{Ni}(\text{OH})_2$ , and a hydrogen absorbing mesoporous negative electrode, e.g. of palladium, as illustrated in the schematic of Figure 1. The mechanism is similar to that operating in Ni-MH batteries where the palladium is replaced by another hydrogen absorbing  
20 material such as  $\text{LaNi}_5$ .

Examples of portable electronic devices which may include the electrochemical cell of the present invention include: portable computers, including the so-called notebook computers, desktop replacement computers, ultraportable computers etc. (the present invention being of particular value in the smaller versions, such as the  
25 ultraportables); mobile telephones; cordless (landline) telephones; PDAs; portable hard disk drives; music players of various sorts, including CD players, cassette players, mini-disk players and other digitally recorded music players, including MP3 and like software-based music players; portable televisions; portable DVD players; portable radios; hybrid devices (i.e. devices serving two or more previously separate functions),

such as PDA/mobile telephones, telephone/music players, hard disk storage/music players etc.

5 All of the above devices require a steady supply of power at a relatively low level, interspersed with periodic demands for much higher power at essentially random intervals. They are, therefore especially suited for use with the electrochemical cells of the present invention. The specifics of the design and construction of these devices is well known and, beyond the incorporation of an electrochemical cell according to the present invention, does not form a part of the present invention.

10 At least the positive electrode, the cathode, of the electrochemical cell of the present invention is formed of a mesoporous material. The material is preferably a metal, a metal oxide, a metal hydroxide, a metal oxy-hydroxide or a combination of any two or more of these. Examples of such metals include: nickel; alloys of nickel, including alloys with a transition metal, nickel/cobalt alloys and iron/nickel alloys; cobalt; platinum; palladium; and ruthenium. Examples of such oxides, hydroxides and  
15 oxy-hydroxides include: gold oxide; palladium oxide; nickel oxide (NiO); nickel hydroxide (Ni(OH)<sub>2</sub>); nickel oxy-hydroxide (NiOOH); and ruthenium oxide.

There is no limitation on the nature of the material used to manufacture the negative electrode, the anode, of the electrochemical cell of the present invention, and any material may be used having regard to the chemistry of the cell which is to be made.  
20 Examples of suitable materials include: carbon; cadmium; iron; a palladium/nickel alloy; an iron/titanium alloy; palladium; or a mixed metal hydride, for example LiNiH<sub>5</sub>. These materials are preferably porous, and more preferably mesoporous. Of these, preferred materials are carbon and palladium. Mesoporous palladium is, however, not the preferred negative electrode material for low cost applications, due to its high cost.

25 Thus, preferably the positive electrode and the negative electrode each comprise a mesoporous structure having a periodic arrangement of substantially uniformly sized pores of cross-section of the order of  $10^{-8}$  to  $10^{-9}$  m. The positive electrode, and the negative electrode if it also is mesoporous, consists of or consists substantially of the mesoporous structure or structures as defined.

By "mesoporous structure", "mesoporous material" and "mesoporous film" as referred to herein are meant structures, materials and films, respectively, that have been fabricated via a liquid crystal templating process, and that consequently are monolithic in nature, and contain a long range, regular arrangement of pores having a defined topology and a substantially uniform pore size (diameter). Accordingly, the mesoporous structures, materials and films may also be described as nanostructured or having nanoarchitecture.

Therefore, the mesoporous materials used in accordance with the invention are distinct from poorly crystallised materials and from composites with discrete nano-sized solid grains, e.g. conventionally denoted 'nanomaterials' that are composed of aggregated nanoparticulates.

An advantage of using mesoporous materials, compared with nanomaterials, is that electron transport within the mesoporous material does not encounter grain boundary resistances, affording superior electronic conductivity and removing power losses associated with this phenomenon. Moreover, the ordered porosity of the mesoporous materials used here provides a continuous and relatively straight, non-tortuous path of flow with uniform diameter, encouraging the rapid and unhindered movement of electrolyte species. By contrast, conventional nanoparticulate systems have a disordered porosity with voids of varying cross section interconnected by narrower intervoid spaces. As such, substances moving within the pore structure encounter a considerably tortuous path, impeding reaction rates.

The mesoporous material is preferably in the form of a film of substantially constant thickness. Preferably, the mesoporous film thickness is in the range from 0.5 to 5 micrometers.

Preferably, the mesoporous material has a pore diameter within the range from about 1 to 10 nanometres, more preferably within the range from 2.0 to 8.0 nm.

The mesoporous material may exhibit pore number densities in the range from  $1 \times 10^{10}$  to  $1 \times 10^{14}$  pores per  $\text{cm}^2$ , preferably from  $4 \times 10^{11}$  to  $3 \times 10^{13}$  pores per  $\text{cm}^2$ , and more preferably from  $1 \times 10^{12}$  to  $1 \times 10^{13}$  pores per  $\text{cm}^2$ .

The mesoporous material has pores of substantially uniform size. By "substantially uniform" is meant that at least 75%, for example 80% to 95%, of pores have pore diameters to within 30%, preferably within 10%, and most preferably within 5%, of average pore diameter. More preferably, at least 85%, for example 90% to 95%, of pores have pore diameters to within 30%, preferably within 10%, and most preferably within 5%, of average pore diameter.

The pores are preferably cylindrical in cross-section, and preferably are present or extend throughout the mesoporous material.

The mesoporous structure has a periodic arrangement of pores having a defined, recognisable topology or architecture, for example cubic, lamellar, oblique, centred rectangular, body-centred orthorhombic, body-centred tetragonal, rhombohedral, hexagonal. Preferably, the mesoporous structure has a periodic pore arrangement that is hexagonal, in which the electrode is perforated by a hexagonally oriented array of pores that are of uniform diameter and continuous through the thickness of the electrode.

In the preferred case where the pore arrangement is hexagonal, the arrangement of pores has a regular pore periodicity, corresponding to the centre-to-centre pore spacing, preferably in the range from 3 to 15 nm, more preferably in the range from 5 to 9 nm.

Moreover, the mesoporous structure having this regular periodicity and substantially uniform pore size should extend over a portion of the electrode of the order of at least 10 times, preferably at least 100 times, the average pore size. Preferably, the electrode consists of or consists substantially of a structure or structures as defined.

It will be appreciated that these pore topologies are not restricted to ideal mathematical topologies, but may include distortions or other modifications of these topologies, provided recognisable architecture or topological order is present in the spatial arrangement of the pores in the film. Thus, term "hexagonal" as used herein encompasses not only materials that exhibit mathematically perfect hexagonal symmetry within the limits of experimental measurement, but also those with significant observable deviations from the ideal state, provided that most channels are



surrounded by an average of six nearest-neighbour channels at substantially the same distance. Similarly, the term "cubic" as used herein encompasses not only materials that exhibit mathematically perfect symmetry belonging to cubic space groups within the limits of experimental measurement, but also those with significant observable  
5 deviations from the ideal state, provided that most channels are connected to between two and six other channels.

The electrolyte in the cell is preferably an aqueous electrolyte, for example an aqueous alkaline electrolyte such as aqueous potassium hydroxide.

In a preferred embodiment, the mesoporous structure of the positive electrode  
10 comprises nickel and an oxide, hydroxide or oxy-hydroxide of nickel selected from NiO, Ni(OH)<sub>2</sub> and NiOOH, said nickel oxide, hydroxide or oxy-hydroxide forming a surface layer over said nickel and extending over at least the pore surfaces, and the negative electrode has a mesoporous structure of carbon or palladium. When filled with electrolyte, the positive electrode represents a three-phase composite composed of an  
15 interconnected Ni current collector base, coated with Ni(OH)<sub>2</sub> active material which is in contact with the electrolyte. Advantageously, the hydrous structure of the mesoporous Ni positive electrode is retained such that both surface and bulk processes can contribute to the charge capacity of the electrode. Due to the nanoscale structure of the electrode, all three phases are in either in intimate contact or within about 1-2 nm of  
20 each other and the overall surface area of the 'phase boundaries' is extremely high. Hence, a high energy density can be achieved, whilst the small proton diffusion distance enables the cell to exhibit very high power density.

The mesoporous materials used as the positive, and optionally the negative, electrodes of the electrochemical cells of the present invention are prepared by a liquid  
25 crystal templating method, and preferably are deposited as films on a substrate by electrochemical deposition from a lyotropic liquid crystalline phase. They may also be prepared by electro-less deposition, such as by chemical reduction from a lyotropic liquid crystalline phase.

Suitable substrates include gold, copper, silver, aluminium, nickel, rhodium or  
30 cobalt, or an alloy containing any of these metals, or phosphorus. The substrate may, if

desired, be microporous, with pores of a size preferably in the range from 1 to 20 micrometres. The substrate preferably has a thickness in the range from 2 to 50 micrometres. The substrate preferably is a substrate as above, other than gold, having a layer of gold formed on it by vapour deposition.

- 5           Suitable methods for depositing mesoporous materials as films onto a substrate by electrochemical deposition and chemical means are known in the art. For example, suitable electrochemical deposition methods are disclosed in EP-A-993,512; Nelson, et al., "*Mesoporous Nickel/Nickel Oxide Electrodes for High Power Applications*", J. New Mat. Electrochem. Systems, 5, 63-65 (2002); Nelson, et al., "*Mesoporous*  
10 *Nickel/Nickel Oxide – a Nanoarchitected Electrode*", Chem. Mater., 2002, 14, 524-529. Suitable chemical reduction methods are disclosed in US-A-6,203,925.

          Preferably, the mesoporous material is formed by electrochemical deposition from a lyotropic liquid crystalline phase. According to a general method, a template is formed by self-assembly from certain long-chain surfactants and water into a desired  
15 liquid crystal phase, such as a hexagonal phase. Suitable surfactants include octaethylene glycol monohexadecyl ether ( $C_{16}EO_8$ ), which has a long hydrophobic hydrocarbon tail attached to a hydrophilic oligoether head group. Others include the polydisperse surfactants Brij<sup>®</sup>56 ( $C_{16}EO_n$  where  $n \sim 10$ ), Brij<sup>®</sup>78 ( $C_{16}EO_n$  where  $n \sim 20$ ), and Pluronic 123, each available from Aldrich. At high (>30%) aqueous  
20 concentrations, and dependent on the concentration and temperature used, the aqueous solution can be stabilised in a desired lyotropic liquid crystal phase, for example a hexagonal phase, consisting of separate hydrophilic and hydrophobic domains, with the aqueous solution being confined to the hydrophilic domain. Dissolved inorganic salts, for example nickel acetate, will also be confined to the hydrophilic domain, and may be  
25 electro-reduced at an electrode immersed in the solution, to form a solid mesophase, for example of nickel metal, that is a direct cast of the aqueous domain phase structure. Subsequent removal of the surfactant, by washing in a suitable solvent, leaves a regular periodic array of pores in the electro-reduced solid, the arrangement of the pores being determined by the lyotropic liquid crystal phase selected. The topology, size,  
30 periodicity and other pore characteristics may be varied by appropriate selection of the surfactant, solvent, metal salts, hydrophobic additives, concentrations, temperature, and deposition conditions, as is known in the art.

As noted above, the mesoporous material of which the mesoporous electrode is made is preferably formed by electrodeposition or chemical deposition on a substrate. Since the mesoporous material may lack adequate mechanical strength, it is preferably used as an electrode on a substrate, and, for convenience, this is preferably the same substrate as was used in its preparation.

The invention is further illustrated by the following non-limiting examples, with reference to the Figures, in which:

Figure 1 represents a schematic drawing showing the flow of protons on charge and discharge to and from a Pd lattice into a NiOOH positive electrode proton sink;

Figure 2 shows a comparison of the cyclic voltammetry of a 1 mm diameter  $H_I$  Pd disc (—) with that of a 200  $\mu m$   $H_I$  Ni disc (- - -) in 6 M KOH at 20  $mV s^{-1}$ ;

Figure 3 shows the charge/discharge behaviour of a 200  $\mu m$   $H_I$  Ni disc based supercapacitor by cyclic voltammetry at 20  $mV s^{-1}$  separated by 1 cm in 6 M KOH;

Figure 4 shows the flow of charge from the device versus potential during the 20  $mV s^{-1}$  discharge depicted in Figure 3;

Figure 5 shows the potential step charging/discharging of a  $H_I$  Ni/ $H_I$  Pd supercapacitor in 6 M KOH composed of a 200  $\mu m$   $H_I$  Ni disc with a 1  $cm^2$   $H_I$  Pd electrode in 6 M KOH;

Figure 6 shows a comparison of the first full cycle (—) of a 1  $cm^2$   $H_I$  Ni/1  $cm^2$   $H_I$  Pd supercapacitor incorporating a porous PTFE separator with the 15000<sup>th</sup> cycle (—) at 500  $mV s^{-1}$ ; and

Figure 7 represents a schematic drawing of the  $H_I$  electrode structure showing a pore ringed by oxidised active material  $Ni(OH)_2$  which is held in a matrix of a nickel current collector, and further showing the active material occupying 45 % of the electrode bulk area.

**EXAMPLES:****EXAMPLE 1****Electrodeposition of platinum from an hexagonal liquid crystalline phase:**

5           3 grams of octaethylene glycol monohexadecyl ether ( $C_{16}EO_8$ ) surfactant were added to 2.0 grams of water and 2.0 grams of hexachloroplatinic acid hydrate in water. The mixture was heated and shaken vigorously until a homogeneous mixture was obtained. Electrodeposition from this mixture was carried out at temperatures between 25°C and 85°C onto a 0.000314 centimetre squared polished gold electrode by stepping  
 10 the potential from +0.6 volt vs standard calomel electrode to -0.1 volt vs standard calomel electrode until a charge of -2 millicoulomb was passed. The surfactant was removed by rinsing with distilled water. A film having a metallic structure was obtained, which upon examination by transmission electron microscopy was found to have an hexagonal disposition of pores with internal diameters of  $25\text{\AA}$  ( $\pm 1.5\text{\AA}$ )  
 15 separated by metal walls of  $25\text{\AA}$  ( $\pm 2\text{\AA}$ ) width.

**EXAMPLE 2****Electrodeposition of platinum from an hexagonal liquid crystalline phase:**

The process of Example 1 was carried out using the shorter-chain surfactant  $C_{12}EO_8$  in place of  $C_{16}EO_8$ . The pore diameters as determined by TEM were found to  
 20 be  $17.5\text{\AA}$  ( $\pm 2\text{\AA}$ ).

**EXAMPLE 3****Electrodeposition of platinum from an hexagonal liquid crystalline phase:**

The process of Example 1 was repeated using a quaternary mixture containing  $C_{16}EO_8$  and n-heptane in the molar ratio 2:1. As determined by TEM, the pore  
 25 diameters were found to be  $35\text{\AA}$  ( $\pm 1.5\text{\AA}$ ).

#### EXAMPLE 4

##### **Electrodeposition of platinum from a cubic liquid crystalline phase:**

A mixture having normal topology cubic phase (indexing to the Ia3d space group) was prepared from 27 wt% of an aqueous solution of hexachloroplatinic acid (33 wt% with respect to water) and 73 wt% of octaethylene glycol monohexadecyl ether (C<sub>16</sub>EO<sub>8</sub>). Electrodeposition onto polished gold electrodes was carried out potentiostatically at temperatures between 35°C and 42°C using a platinum gauze counterelectrode. The cell potential difference was stepped from +0.6 V versus the standard calomel electrode to -0.1 V versus the standard calomel electrode until a charge of 0.8 millicoulombs was passed. After deposition the films were rinsed with copious amounts of deionised water to remove the surfactant. The washed nanostructured deposits were uniform and shiny in appearance. Transmission electron microscopy studies revealed a highly porous structure consisting of a three-dimensional periodic network of cylindrical holes with internal diameters of 25Å.

#### EXAMPLE 5

##### **Electrodeposition of nickel from an hexagonal liquid crystalline phase:**

A mixture having normal topology hexagonal phase was prepared from 50 wt% of an aqueous solution of 0.2 M nickel (II) sulphate, 0.58 M boric acid, and 50 wt% of octaethylene glycol monohexadecyl ether (C<sub>16</sub>EO<sub>8</sub>). Electrodeposition onto polished gold electrodes was carried out potentiostatically at 25°C using a platinum gauze counterelectrode. The cell potential difference was stepped to -1.0 V versus the saturated calomel electrode until a charge of 1 coulomb per centimetre squared was passed. After deposition the films were rinsed with copious amounts of deionised water to remove the surfactant. The washed nanostructured deposits were uniform and shiny in appearance. Small angle X-ray diffraction studies of the electrodeposited tin revealed a lattice periodicity of 58Å, while transmission electron microscopy studies revealed a highly porous structure consisting of cylindrical holes with internal diameters of 34Å separated by nickel walls 28Å thick.

## EXAMPLE 6

Depositions were carried out on gold plate electrodes at 25°C at a deposition potential of -0.1V vs SCE (stepped from +0.6 V) from an hexagonal liquid crystalline phase consisting of 2.0g H<sub>2</sub>O, 3.0g C<sub>16</sub>EO<sub>8</sub> and 2.0g hexachloroplatinic acid. Thickness data were obtained by inspection of fractured samples using scanning electron microscopy. The results are shown in Table 1 below:

Charge density (C cm <sup>-2</sup> )	Film Thickness (nm)
0.64	92
1.0	277
2.0	517
4.00	744
6.37	1849
21.98	15455

Table 1. Relationship between charge density and nanostructured platinum film thickness.

## EXAMPLE 7

Nanostructured platinum films were deposited from an hexagonal liquid crystalline phase consisting of 2.0g H<sub>2</sub>O, 3.0g C<sub>16</sub>EO<sub>8</sub> and 2.0g hexachloroplatinic acid. Depositions were carried out on 0.2 mm diameter gold disc electrodes at a deposition potential of -0.1 V vs SCE (stepped from +0.6 V). The charge passed was 6.37 C cm<sup>-2</sup>. Data were obtained from cyclic voltammetry in 2M sulphuric acid between potential limits -0.2 V and +1.2 V vs SCE. The Roughness Factor is defined as the surface area determined from electrochemical experiments divided by the geometric surface area of the electrode. The results are shown in Table 2 below:

Temperature (°C)	Roughness Factor	Capacitance (μF cm <sup>-2</sup> )
25	305	25510
35	379	29936
40	457	37580
50	517	40127
65	540	45541
75	581	55733
85	711	63376

Table 2. Effect of temperature on Roughness Factor and double layer capacitance.

## EXAMPLE 8

Nanostructured platinum films were deposited from an hexagonal liquid crystalline phase consisting of 2.0g H<sub>2</sub>O, 3.0g C<sub>16</sub>EO<sub>8</sub> and 2.0g hexachloroplatinic acid. Depositions were carried out on 0.2 mm diameter gold disc electrodes at a deposition potential indicated (stepped from +0.6 V). The charge passed was 6.37 C cm<sup>-2</sup>. Data were obtained from cyclic voltammetry in 2M sulphuric acid between potential limits -0.2 V and +1.2 V vs SCE. The results are shown in Table 3 below:

E <sub>2</sub> (V (vs SCE))	Roughness Factor	Capacitance (μF cm <sup>-2</sup> )
+0.1	34	4086
0.0	86	9268
-0.1	261	26105
-0.2	638	66783
-0.3	35	3924
-0.4	24	2250

Table 3. Effect of deposition potential on Roughness Factor and double layer capacitance.

#### 10 Discussion of Examples 1 to 8:

The data in Examples 1 to 3 show how pore diameter can be controlled by variation of the chain length of the surfactant or by further addition of a hydrophobic hydrocarbon additive. Specifically, a comparison of Example 1 with Example 2 demonstrates that the pore size may be decreased by using a shorter-chain surfactant, whereas comparison of Example 1 with Example 3 shows that the pore size may be increased by the addition of a hydrocarbon additive to the deposition mixture.

Example 6 demonstrates how the thickness of the deposited film may be controlled by varying the charge passed during electrodeposition.

Examples 7 and 8 show how the temperature and applied potential during electrodeposition affect the surface area and the double layer capacitance of the film. As indicated by the Roughness Factor values, increasing the deposition temperature increases both the surface area and the double layer capacitance of the film. At the same time, the deposition potential may be so selected as to control the surface area and capacitance of the deposited film.

**EXAMPLE 9**

Preparation of mesoporous nickel and mesoporous palladium electrodes:

**(i) Preparation of gold substrate:**

5 Gold discs (200  $\mu\text{m}$  or 1 mm diameter) encased in an epoxy insulator, and thin film gold electrodes (approximately 1  $\text{cm}^2$ ) made by evaporation of gold onto chromium-coated glass microscope slides, were prepared as follows, for subsequent deposition of mesoporous nickel and palladium electrodes:

10 The gold disc electrodes were cleaned by first polishing consecutively on 25  $\mu\text{m}$ , 1  $\mu\text{m}$  and 0.3  $\mu\text{m}$  alumina (obtained from Buehler) embedded microcloths then cycling the electrodes between  $-0.6\text{ V}$  and  $1.4\text{ V}$  vs. a saturated mercury sulphate reference electrode (SMSE) at  $200\text{ mVs}^{-1}$  for 5 min. in 2 M  $\text{H}_2\text{SO}_4$  solution. With each cycle, a monolayer of gold oxide was formed and subsequently removed from the electrode surface.

15 The evaporated gold electrodes were cleaned in an ultrasonic bath of isopropanol for 60 minutes prior to deposition, then rinsed with de-ionized water and dried under ambient conditions.

**(ii) Electrodeposition of nickel from an hexagonal liquid crystalline phase:**

20 A mixture having normal topology hexagonal ( $\text{H}_1$ ) phase was prepared from 35 wt% of an aqueous solution of 0.2 M nickel (II) acetate, 0.5 M sodium acetate and 0.2 M boric acid, and 65 wt% of Brij<sup>®</sup> 56 nonionic surfactant ( $\text{C}_{16}\text{EO}_n$  wherein  $n \sim 10$ , from Aldrich), and electrodeposition onto polished gold substrate was carried out potentiostatically at  $25^\circ\text{C}$  using a platinum gauze counterelectrode, according to the method disclosed in Nelson et al., Chem. Mater., 2002, 14, 524-529. After deposition the films were washed in copious amounts of isopropanol for 24 hrs to remove the  
25 surfactant. A mesoporous nickel film of approximately 1 micrometer thickness and having an hexagonal arrangement of pores was obtained.

**(iii) Electrodeposition of palladium from an hexagonal liquid crystalline phase:**



A mixture having normal topology hexagonal ( $H_I$ ) phase was prepared from 35 wt% of an aqueous solution of 0.5 M ammonium tetrachloropalladate (Premion, from Alfa Aesar), and 65 wt% of Brij<sup>®</sup> 56 nonionic surfactant ( $C_{16}EO_n$  wherein  $n \sim 10$ , from Aldrich). The presence of the  $H_I$  liquid crystalline phase in the palladium

5 deposition template solution at 25 °C was confirmed using polarising light microscopy. Electrodeposition onto polished gold substrate was carried out potentiostatically at 25°C using a platinum gauze counterelectrode, according to the electrodeposition method disclosed in Bartlett et al., Phys. Chem. Chem. Phys., 2002, 4, 3835-3842, using the modified templating solution above. After deposition the films were washed in copious  
10 amounts of isopropanol for 24 hrs to remove the surfactant. A mesoporous palladium film of approximately 1 micrometer thickness and having an hexagonal arrangement of pores was obtained.

**(iv) Examination of electrodeposited mesoporous Ni and Pd electrodes:**

The deposited mesoporous electrodes, as prepared in (ii) and (iii) above, were  
15 individually examined by cyclic voltammetry prior to assembly of the supercapacitor. This was done in a three electrode cell containing 6 M KOH solution. The cell consisted of a Pyrex water-jacketed cell connected to a Grant ZD thermostated water bath, mercury/mercury oxide (6 M KOH) reference electrode (Hg/HgO) and a large area Pt gauze counter electrode. All experiments were carried out at 25 °C and potentials in  
20 experiments involving a reference electrode are quoted against the Hg/HgO reference.

The efficiency of the mesoporous nickel deposition process was quantified by anodic stripping voltammetry. This involved scanning the potential of a mesoporous nickel working electrode between -0.45 V and 0.9 V vs. a saturated calomel reference electrode (SCE) in 0.2 M HCl solution at 1 mV s<sup>-1</sup>. The counter electrode was Pt gauze.  
25 The charge associated with the anodic nickel dissolution peak and comparison of this charge with the deposition charge gave a deposition efficiency of 34 %.

Cyclic voltammetry and potential step experiments were done using a custom made potentiostat and ramp generator interfaced with a National Instruments data acquisition card and LabVIEW software.

In order to compare the electrochemical characteristics of mesoporous Ni and mesoporous Pd, the cyclic voltammograms of both of these electrodes in 6 M KOH are overlaid in Figure 2. The anodic peak for Ni at 0.38 V vs. Hg/HgO shows oxidation of Ni(OH)<sub>2</sub> to NiOOH via Reaction (1) with subsequent reduction back to Ni(OH)<sub>2</sub> represented by the cathodic peak commencing at 0.4 V. The latter peak represents the proton storage capacity of the electrode, that is, the reversible capacity of the electrode for proton storage. In Figure 2, this is 295 mC cm<sup>-2</sup>.

The electrochemistry of H<sub>1</sub> Pd in 6 M KOH is more diverse with anodic currents due to oxide formation at positive potentials and subsequent stripping of this oxide with the cathodic peak at -0.25 V. Adsorption of hydrogen adatoms onto the Pd surface by formation of the surface palladium hydride is indicated by the small cathodic peak at around -0.75 V followed by the more substantial hydrogen absorption into the Pd lattice indicated by the large current superimposed on the hydrogen evolution current at potentials below -1 V. On reversal of potential in the positive direction hydrogen begins to desorb from the Pd as represented by the large anodic peak commencing at -0.8 V and peaking at -0.36 V. Based on comparison of the voltammetry of mesoporous Ni and mesoporous Pd, it may be expected that a charge storage device using these 2 electrodes would have a discharge voltage of approximately 1.2 V since this is approximately the potential difference between the onset of H<sup>+</sup> desorption from Pd (-0.8 V vs. Hg/HgO) and the intercalation of H<sup>+</sup> into NiOOH (0.4 V vs. Hg/HgO). This discharge voltage is variable with the state of charge of the Pd which can vary between -0.8 V vs. Hg/HgO for a fully charged electrode to -0.3 V vs. Hg/HgO where the Pd is fully discharged of hydrogen at 20 mV s<sup>-1</sup>.

**(v) Assembly and testing of charge/discharge characteristics of supercapacitor:**

In order to study the performance and limitations of mesoporous nickel in a supercapacitor configuration, a negative electrode with higher capacity and power capability was needed. For this purpose, liquid crystal templated mesoporous palladium, as prepared in (iii) above, was used. The size of the mesoporous palladium electrode was made significantly larger than the mesoporous nickel electrode such that performance limitations would be due to limitations in the nickel electrode.

Accordingly, a two-electrode supercapacitor without a separator was assembled using a 200  $\mu\text{m}$  diameter mesoporous nickel positive electrode of approximately 1  $\mu\text{m}$  thickness in conjunction with a 1  $\text{cm}^2$  mesoporous palladium electrode separated by 1 cm in 6 M KOH solution. The deposition charge in synthesis of the mesoporous nickel in this case, as prepared in (ii) above, was  $-1.13 \text{ mC}$ , which corresponds to a mass of 0.117  $\mu\text{g}$  when taking into account a deposition efficiency of 34 %.

Figure 3 shows the cyclic voltammogram of the two-electrode supercapacitor cycled in the potential range 0 V to 1.3 V. At approximately 1.22 V the device is charged, corresponding to the removal of protons from the  $\text{Ni}(\text{OH})_2$  and formation of  $\text{NiOOH}$ . Discharge occurs as protons from the Pd lattice move into the  $\text{NiOOH}$  structure reforming  $\text{Ni}(\text{OH})_2$  as indicated by the cathodic peak. The discharge current in this 20  $\text{mV s}^{-1}$  cycle peaks at  $67 \text{ mA cm}^{-2}$  and the total charge passed is  $257 \text{ mC cm}^{-2}$ .

The shape of the voltammogram of Figure 3 more closely resembles that of a battery than a supercapacitor. Here, as is more clearly illustrated in Figure 4, the majority of the charge on discharge is passed above 1.18 V.

In order to determine how fast the supercapacitor could be charged and discharged the potential of the device was stepped between 0 V (discharged state) and 1.3 V (charged state) and the current response measured at 25°C. Figure 5 shows a single charge/discharge step sequence. During the anodic spike 800  $\text{mC cm}^{-2}$  of charge is passed. Discharge of the device is represented by the large cathodic spike with a maximum amplitude of 50  $\text{A cm}^{-2}$  as protons move into the  $\text{NiOOH}$ . Here, 276  $\text{mC cm}^{-2}$  is passed during the discharge step, 222  $\text{mC cm}^{-2}$  ( $7 \times 10^{-5} \text{ C}$  over the 200  $\mu\text{m}$  diameter or 166  $\text{mA.h g}^{-1}$ ) of which is passed in the first 50 ms.

#### (vi) Assembly and testing of cycle life of supercapacitor:

In order to examine cycle life, a supercapacitor was assembled in a configuration consisting of mesoporous nickel and palladium electrodes, as prepared in (ii) and (iii) above, deposited onto 1  $\text{cm}^2$  evaporated gold substrates, the mesoporous Ni and mesoporous Pd electrodes being separated by a 6 M KOH filled porous PTFE membrane. The cyclability of the nickel-palladium supercapacitor was investigated by continuously cycling the device at 500  $\text{mV s}^{-1}$  in the potential range 0 V to 1.2 V. All

performance data are quoted in units with respect to the mass or geometric area of the nickel electrode.

As illustrated in Figure 6, the shape of the voltammogram is considerably different to that presented in Figure 3. The peaks are considerably broader and are separated by approximately 0.5 V as opposed to only 0.07 V in Figure 3. This is due to a combination of the IR limitation imposed on the cell with the introduction of the porous separator and the slow electrochemical response of the Pd, the capacity of which was not significantly larger than that of the  $\text{Ni}(\text{OH})_2$  electrode in this configuration. Figure 6 compares the first full 4.8 s cycle with the 15000th. The similar form of voltammogram shows that the electrode has not deteriorated significantly during cycling. A shift in peak potentials towards lower values is believed to be due to oxygen ingress, decreasing the average hydrogen content of the palladium electrode and therefore increasing the potential of the negative electrode. An increase in the charge per cycle is believed to be due to thickening of the oxide layer during cycling.

This result has two implications. The first is that the mesoporous electrodes seem to resist the decrepitation on cycling that is associated with capacity decay in other supercapacitor and battery systems that utilize insertion processes. Thus, a uniform monolithic structure such as that illustrated in Figure 7 appears to withstand the strain of volume expansion and contraction better than those consisting of an aggregation of sintered particles of non-uniform size distribution.

The second implication addresses the fact that not only does the mesoporous Ni electrode capacity resist decay, but actually increases with cycling. This effect is rationalized by understanding that in 6 M KOH under potential cycling conditions the amount of  $\text{Ni}(\text{OH})_2$  in a Ni electrode can increase with time as more of the Ni base metal is oxidized. In effect this increases the amount of active material in the electrode and hence the capacity. A number of groups have previously shown that the capacity of an electrodeposited Ni electrode may be increased by up to 30 times by application of the appropriate cycling conditions in alkaline solution. Here, such a large increase in capacity is not expected in the present arrangement, since during initial cycling already 45 % by mass of the electrode material is utilised. In any case, a large increase in capacity corresponding to complete conversion of the Ni base metal to the electrically

non-conducting  $\text{Ni}(\text{OH})_2$  would be undesirable since this would destroy the continuous path of Ni metal in the mesoporous electrode which provides electrocal conductivity and acts as a nanoscale current collector (see Figure 7).

**CLAIMS:**

1. An electrochemical cell for a portable electronic device, said cell having a positive electrode, a negative electrode and an electrolyte, characterised in that at least the positive electrode comprises a mesoporous structure having a periodic arrangement of substantially uniformly sized pores of cross-section of the order of  $10^{-8}$  to  $10^{-9}$  m.
2. An electrochemical cell according to any preceding claim, wherein the mesoporous structure of the positive electrode is formed of a material selected from a metal, a metal oxide, a metal hydroxide or a combination of any two or more of these.
3. An electrochemical cell according to any preceding claim, wherein the mesoporous structure of the positive electrode comprises a metal and a metal oxide or hydroxide, said metal oxide or hydroxide forming a surface layer over said metal and extending over at least the pore surfaces.
4. An electrochemical cell according to any preceding claim, wherein the mesoporous structure of the positive electrode comprises a metal selected from: nickel; alloys of nickel, including alloys with a transition metal, nickel/cobalt alloys and iron/nickel alloys; cobalt; platinum; palladium; and ruthenium.
5. An electrochemical cell according to any preceding claim, wherein the mesoporous structure of the positive electrode comprises a metal oxide, hydroxide or oxy-hydroxide selected from: gold oxide; palladium oxide; nickel oxide (NiO); nickel hydroxide (Ni(OH)<sub>2</sub>), nickel oxy-hydroxide (NiOOH) and ruthenium oxide.
6. An electrochemical cell according to any preceding claim, wherein the mesoporous structure has a pore diameter within the range from 1 to 10 nm, preferably from 2.0 to 8.0 nm.
7. An electrochemical cell according to any preceding claim, wherein the mesoporous structure has a pore number density of from  $4 \times 10^{11}$  to  $3 \times 10^{13}$  pores per  $\text{cm}^2$ , preferably from  $1 \times 10^{12}$  to  $1 \times 10^{13}$  pores per  $\text{cm}^2$ .

8. An electrochemical cell according to any preceding claim, wherein at least 85 % of the pores in the mesoporous structure have pore diameters to within 30 %, preferably within 10 %, more preferably within 5 %, of the average pore diameter.
9. An electrochemical cell according to any preceding claim, wherein the mesoporous structure has a hexagonal arrangement of pores that are continuous through the thickness of the electrode.
10. An electrochemical cell according to claim 9, wherein the hexagonal arrangement of pores has a pore periodicity of in the range from 5 to 9 nm.
11. An electrochemical cell according to any preceding claim, wherein the negative electrode comprises a mesoporous structure having a periodic arrangement of substantially uniformly sized pores of cross-section of the order of  $10^{-8}$  to  $10^{-9}$  m.
12. An electrochemical cell according to any preceding claim, wherein the mesoporous structure is a film having a thickness in the range from 0.5 to 5 micrometers.
13. An electrochemical cell according to any preceding claim, wherein the negative electrode comprises a material selected from: carbon; cadmium; iron; a palladium/nickel alloy; an iron/titanium alloy; palladium; and the mixed metal hydride  $\text{LiNi}_5\text{H}_x$ .
14. An electrochemical cell according to any preceding claim, wherein the negative electrode comprises a material selected from carbon and palladium.
15. An electrochemical cell according to any preceding claim, wherein the mesoporous structure of the positive electrode comprises nickel and an oxide, hydroxide or oxy-hydroxide of nickel selected from  $\text{NiO}$ ,  $\text{Ni}(\text{OH})_2$  and  $\text{NiOOH}$ , said nickel oxide or hydroxide forming a surface layer over said nickel and extending over at least the pore surfaces, and the negative electrode has a mesoporous structure of carbon or palladium.

16. An electrochemical cell according to any preceding claim, wherein the cell is constructed to function as a battery, as a supercapacitor or as a combined battery/supercapacitor.
17. A portable electronic device containing an electrochemical cell according to any preceding claim.



**ABSTRACT:**Electrochemical Cell For Use In Portable Electronic Devices

An electrochemical cell for a portable electronic device is provided, said cell having a positive electrode, a negative electrode and an electrolyte, characterised in that at least the positive electrode comprises a mesoporous structure having a periodic arrangement of substantially uniformly sized pores of cross-section of the order of  $10^{-8}$  to  $10^{-9}$  m.



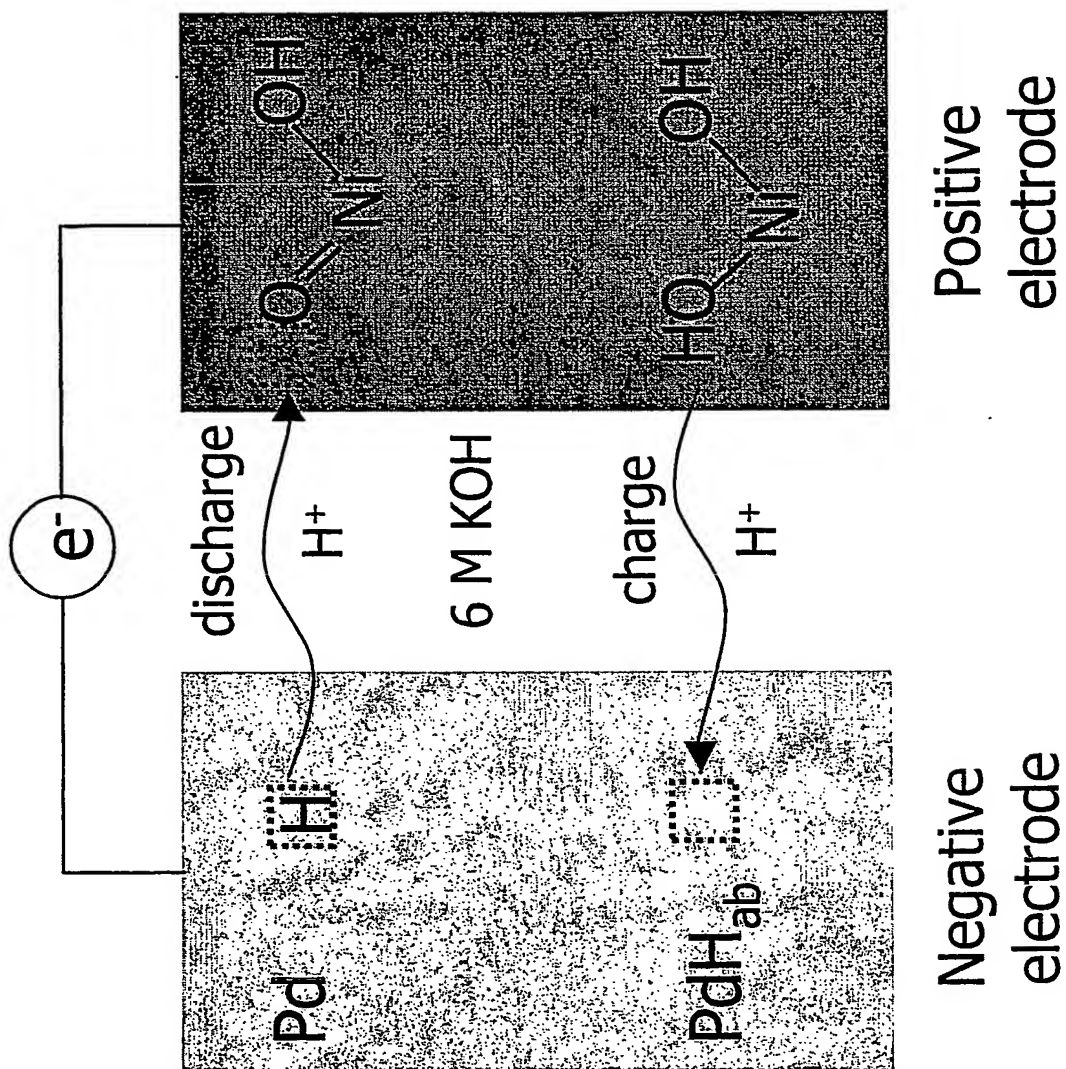


Figure 1.

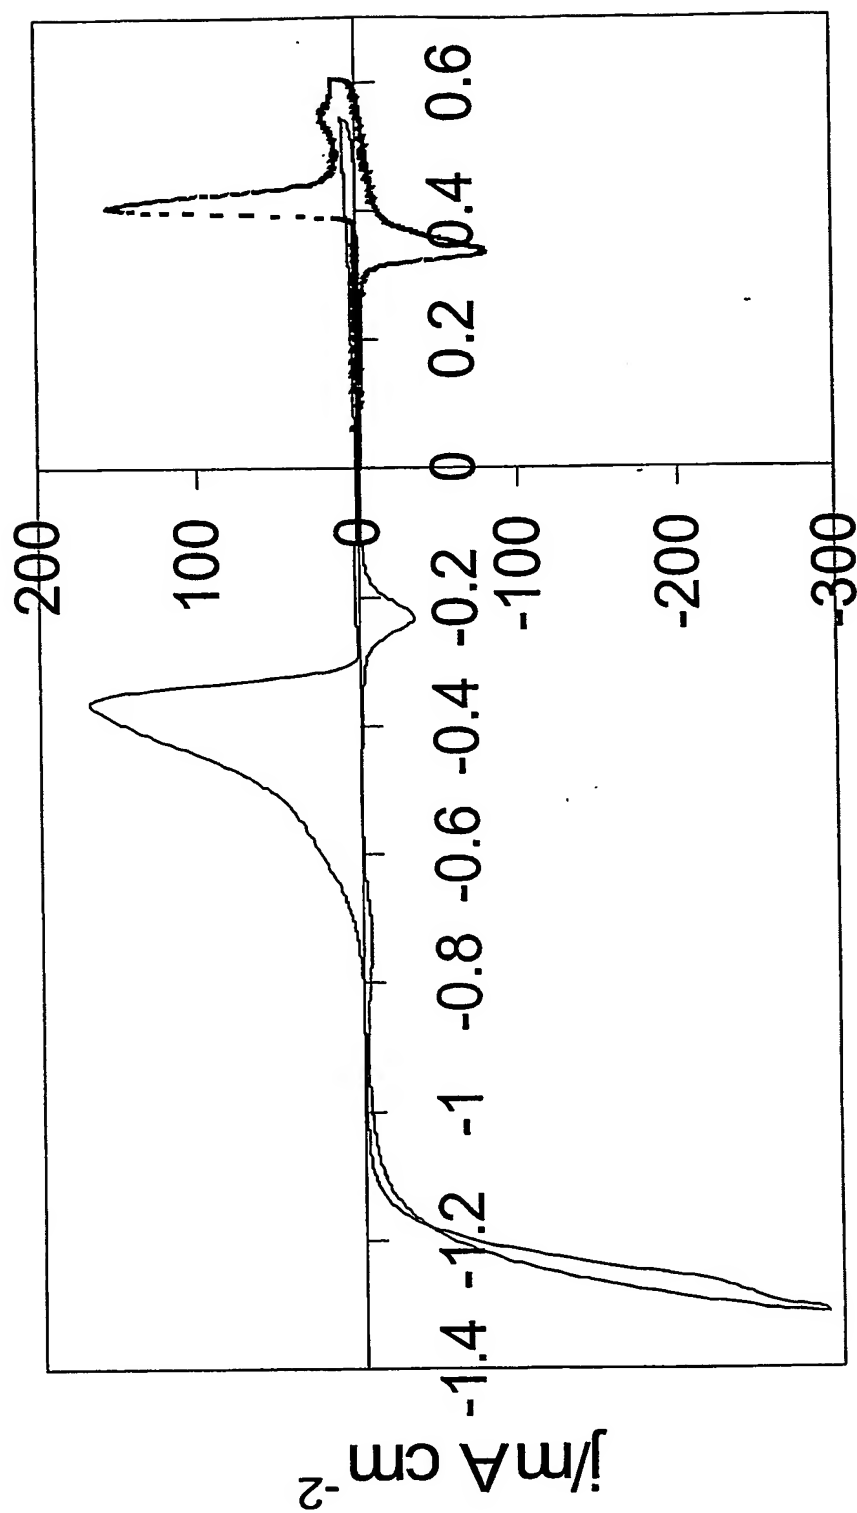

E vs Hg/HgO /V

Figure 2

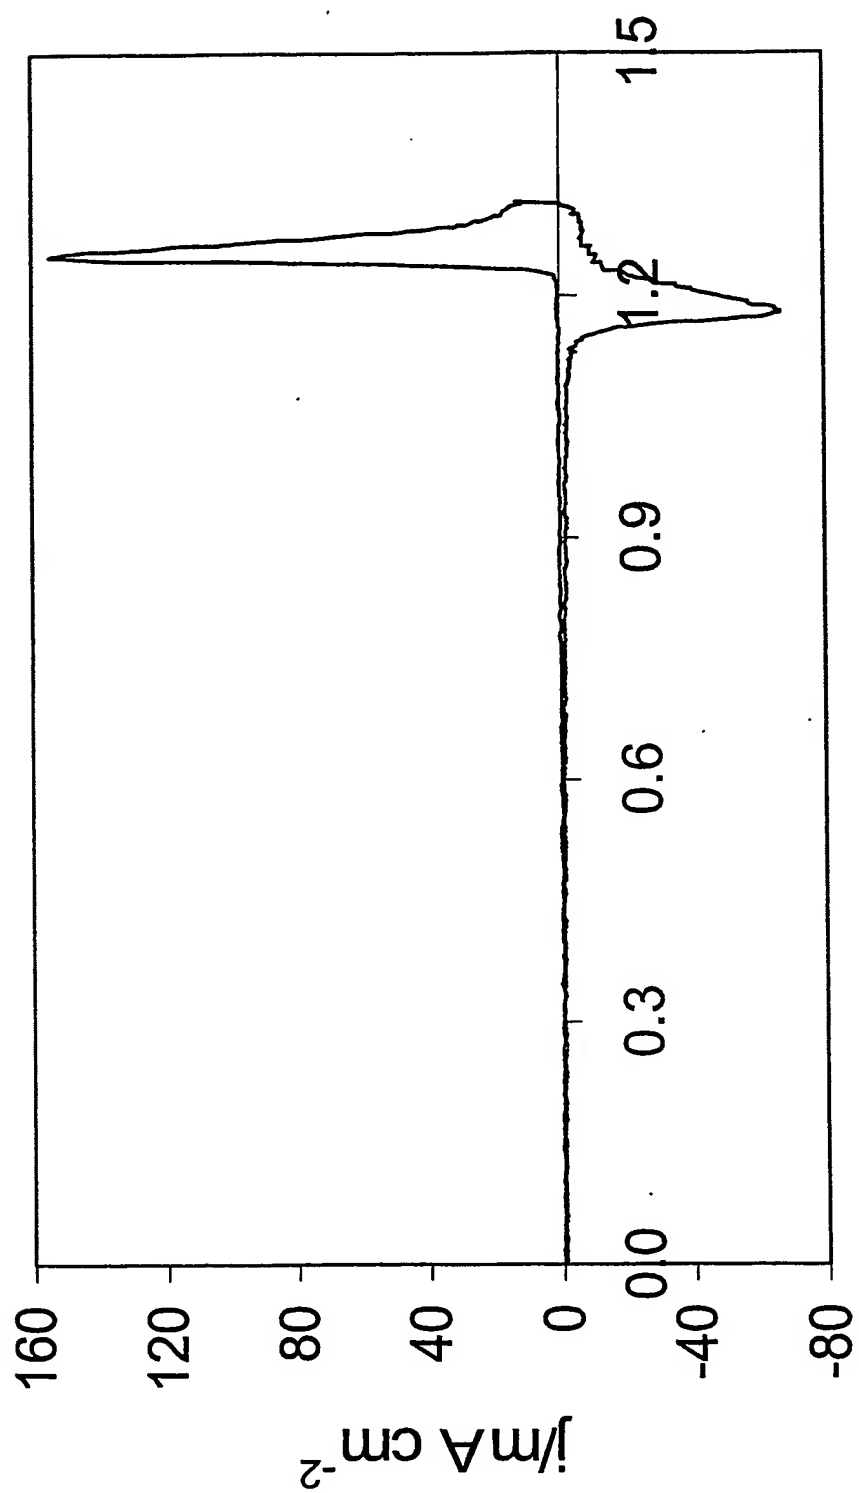

E/V

Figure 3.

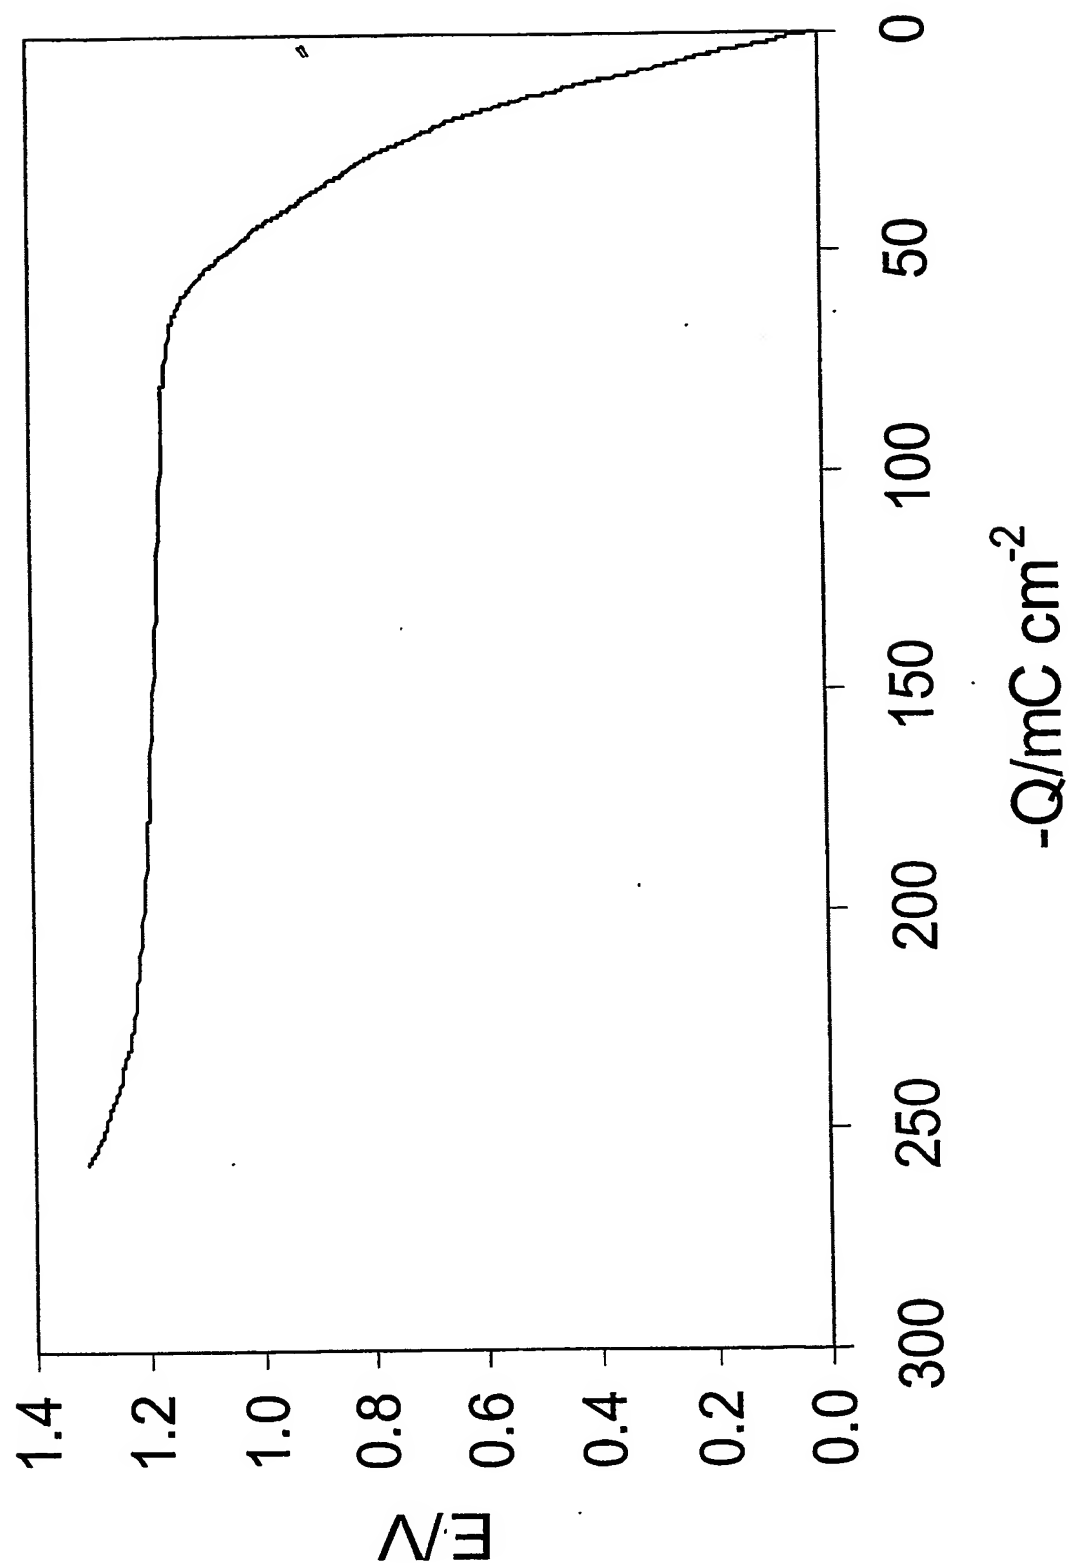


Figure 4.

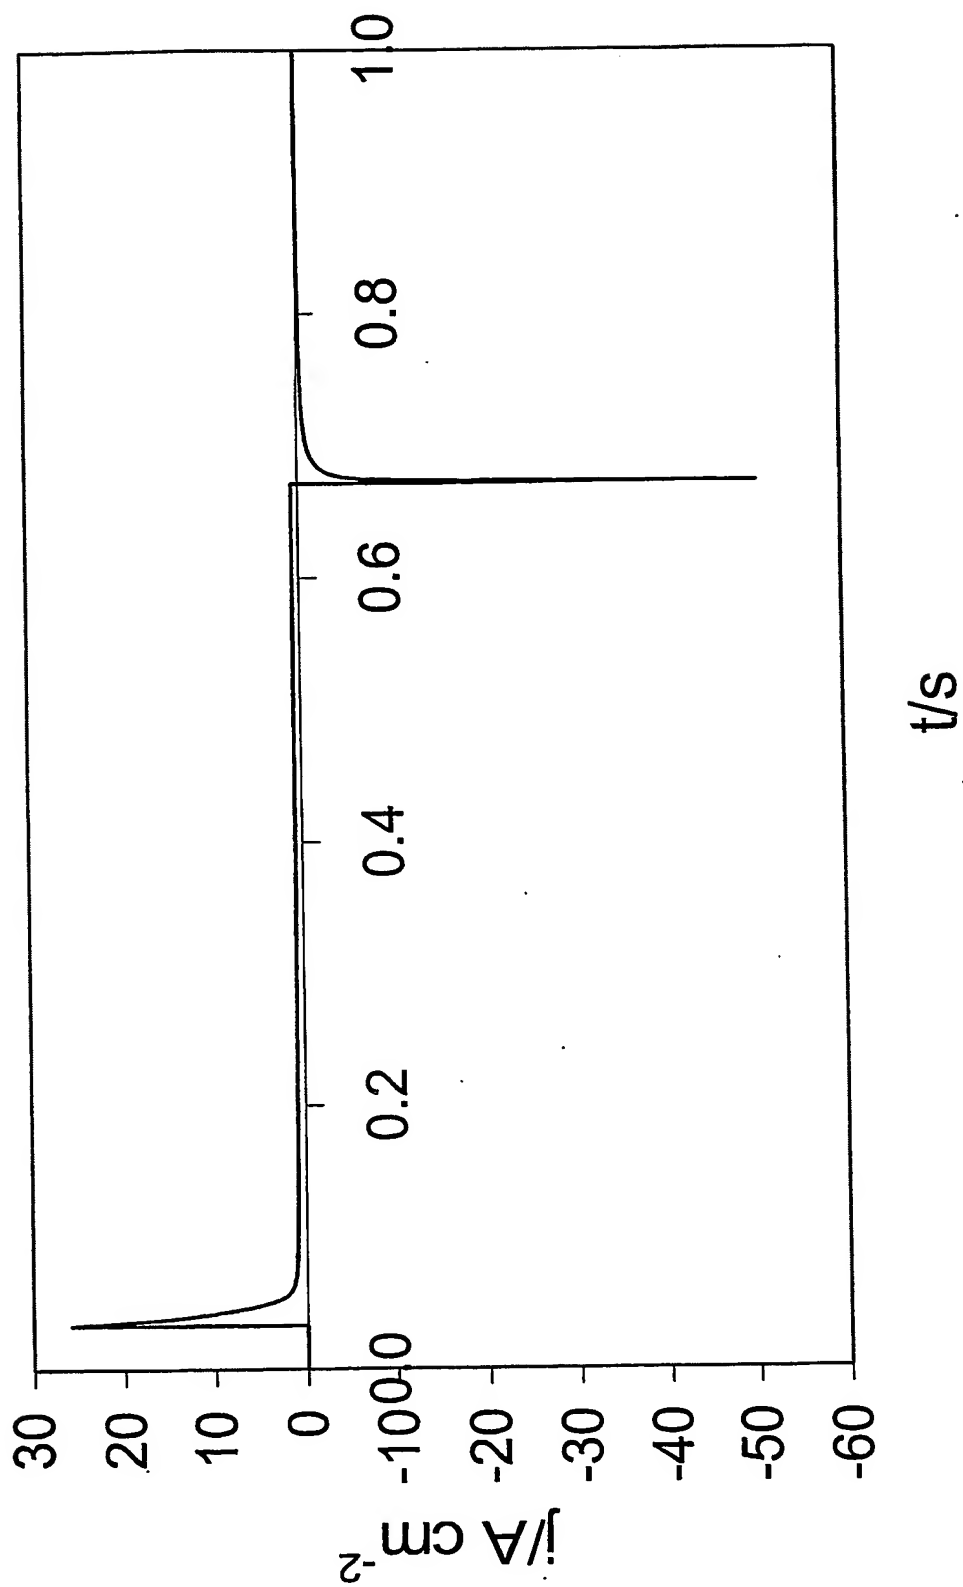


Figure 5

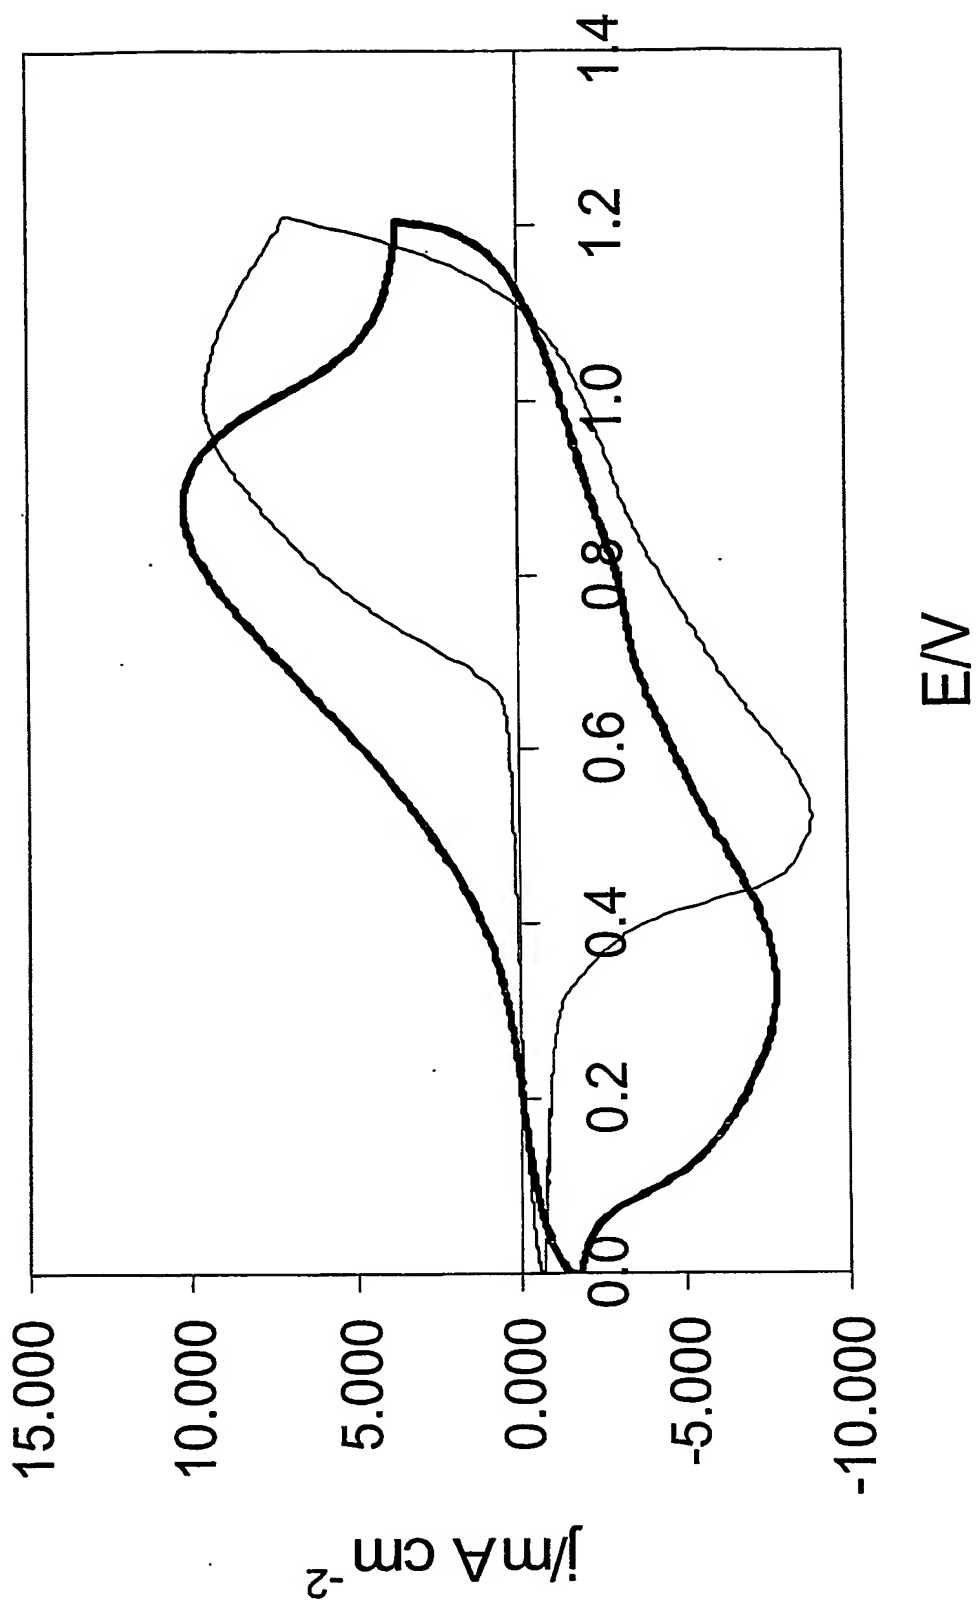


Figure 6.

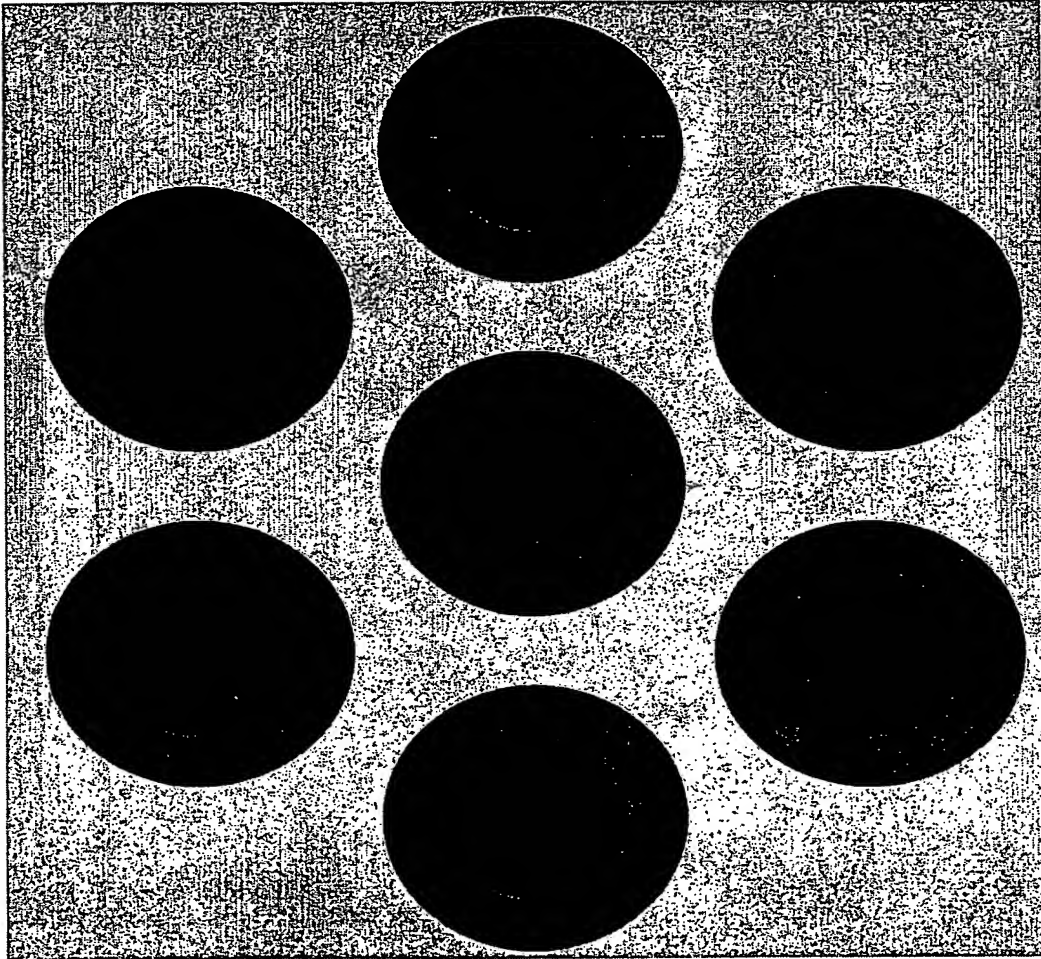


Figure 7.



PCT Application

**GB0305442**

